

PNEUMATRON



www.pneumatron.co.za

sales01@pneumatron.co.za

3/2 Industrial Solenoid Valve PE32 Brass Series 3/2 Valves N/C OR Diverter

USE Supply Pressure on PORT 2 - For N/Closed Functioning
USE Supply Pressure on PORT 1 - For Flow Divert to Port 2 or 3

Medium: Air, Water, Steam, Oil, etc
Temperature: VITON: -10°C to 140°C(Standard)
Pressure: PE32 - 0.0 to 8 Bar
Port Size: 1/4"
Orifice (mm): DN 1.5mm
Coil voltages: 24VDC/220VAC
Coils: CPE32
Material: Brass with Viton seal

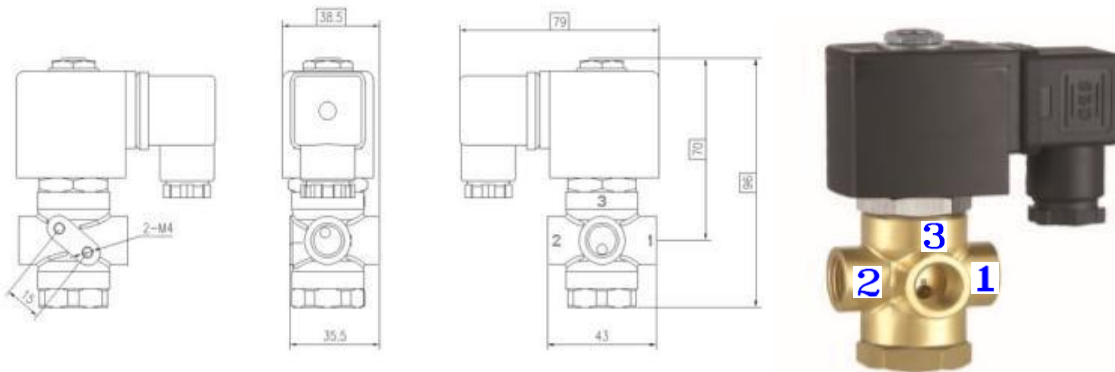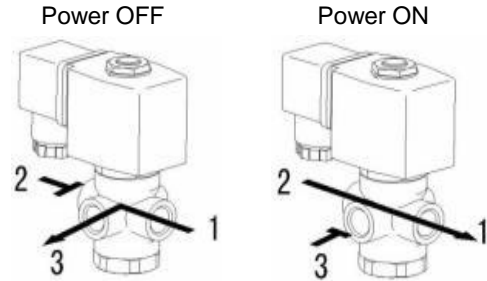

Port Size	Orifice	Kv	Min Pressure	Max Pressure		Seals Material	Body Material	Valve Body	Coil
				AC(17VA)	DC(14W)				
1/4"	2	0.13	0.0Bar	8 Bar	8 Bar	VITON	Brass	PE32BH025S02V	CPE32