

# PNEUMATRON

www.pneumatron.co.za

sales01@pneumatron.co.za



## 3/2 Industrial Solenoid Valve

### PE32 Brass Series 3/2 Valves N/C OR Diverter

USE Supply Pressure on PORT 2 - For N/Closed Functioning

USE Supply Pressure on PORT 1 - For Flow Divert to Port 2 or 3

**Medium:** Air, Water, Steam, Oil, etc  
**Temperature:** VITON: -10°C to 140°C( Standard)  
**Pressure:** PE32 - 0.0 to 9 Bar-DC/11Bar-AC  
**Port Size:** 1/4"  
**Orifice (mm):** DN 1.5mm  
**Coil voltages:** 24VDC/220VAC  
**Coils:** CPE32  
**Material:** Brass with Viton seal

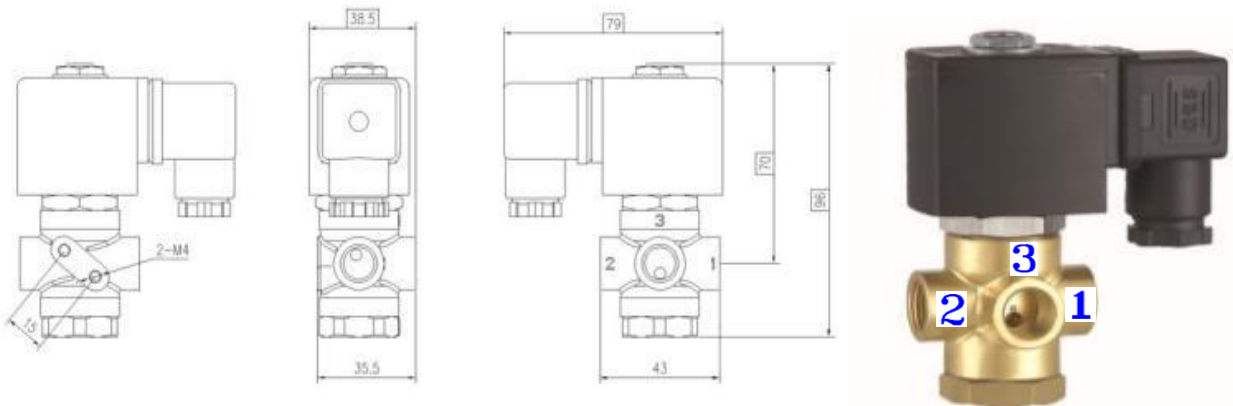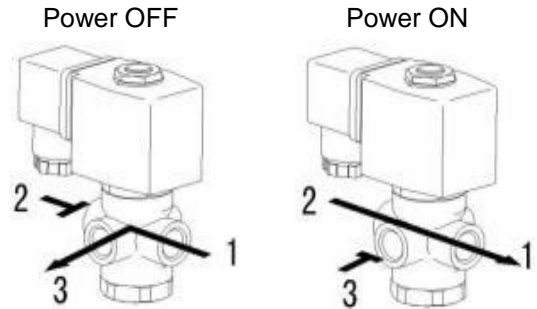

Port Size	Orifice	Kv	Min Pressure	Max Pressure		Seals Material	Body Material	Valve Body	Coil
				AC(17VA)	DC(14W)				
1/4"	2	0.13	0.0Bar	11Bar	9Bar	VITON	Brass	PE32BH025S02V	CPE32