

PNEUMATRON

www.pneumatron.co.za

sales01@pneumatron.co.za



3/2 Industrial Solenoid Valve

PE32 Series , 1/4" 3/2 Valves (NClosed) OR Diverter

USE Supply Pressure on PORT 2 - For N/Closed Functioning

USE Supply Pressure on PORT 1 - For Flow Divert to Port 2 or 3

- Medium:** Air, Water, Steam, Oil, etc
- Temperature:** VITON: -10°C to 140°C (Standard)
- Pressure:** PE32 - 0.0 to 9 Bar-DC/11Bar-AC
- Port Size:** 1/4"
- Orifice (mm):** DN 1.5mm
- Coil voltages:** 24VDC/220VAC
- Coils:** CPE32
- Material:** S/S 304 with Viton seal

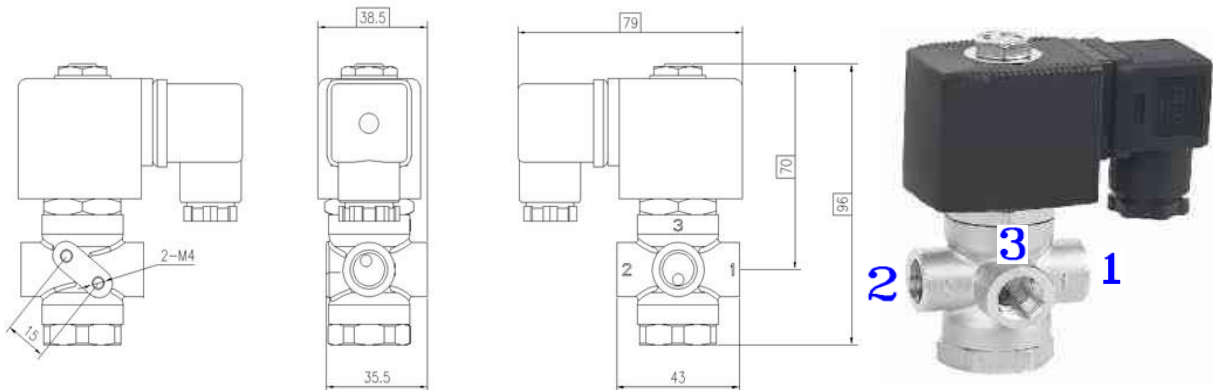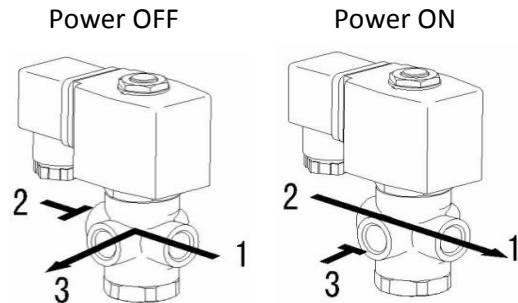

Port Size	Orifice	Kv	Min Pressure	Max Pressure		Seals Material	Body Material	Valve Body	Coil
				AC(17VA)	DC(14W)				
1/4"	2	0.13	0.0Bar	11Bar	9Bar	VITON	S/Steel	PE32SH025S02V	CPE32