

# PNEUMATRON


www.pneumatron.co.za

sales01@pneumatron.co.za


## 2/2 Industrial Solenoid Valve PLM222 Series , Direct Acting (N.C)

**Characteristic:**

1. Direct acting miniature construction at low power consumption
2. Compact design to save the space
3. Applied to low pressure system, open from 0 bar



**Medium:** Air Gas, Water  
**Temperature:** VITON: -10°C to 140°C  
**Pressure:** 0.0 to 13Bar (AC) (Gasses & Liquids)  
**Body:** Brass (Standard)  
**Port Size:** 1/4"  
**Orifice (mm):** 2mm  
**Coil voltages:** 220VAC, 24VDC  
**Coils:** IP65, 100%ED

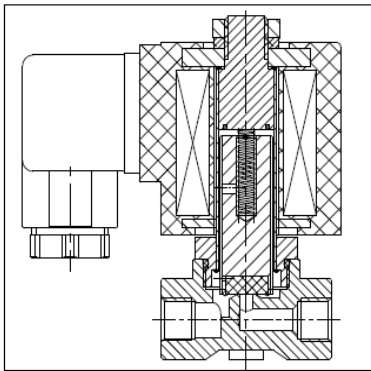

Picture does not show DIN Plug connector, but it is included.

### PLM222 Series, Normally Closed with Coil

Port Size	Orifice (mm)	KV	Min Pressure	Max Pressure		Seals Material	Body Material	Valve Body	Coil
				AC (6VA)	DC (6VA)				
1/4"	2	0.11	0 Bar	13 Bar	10 Bar	VITON	Brass	PLM222BH02S02V	C11

