

PNEUMATRON

www.pneumatron.co.za

sales01@pneumatron.co.za


3/2 Industrial Solenoid Valve

PLT32 Brass Series 3/2 Valves Normally Closed

USE Supply Pressure on PORT 2 - For N/Closed Functioning

USE Supply Pressure on PORT 1 - For Flow Divert to Port 2 or 3

Medium: Air Gas, Water & Light oil \leq 20 CST
Temperature: VITON: -10°C to 140°C(Standard)
Pressure: Water, air & Light oil \leq 20CST: 0.0 to 8 Bar
Port Size (BSP): 1/4"
Orifice: 2mm
Coil voltages: 220VAC, 24VDC, 12VDC
Material: Brass body with Viton seal

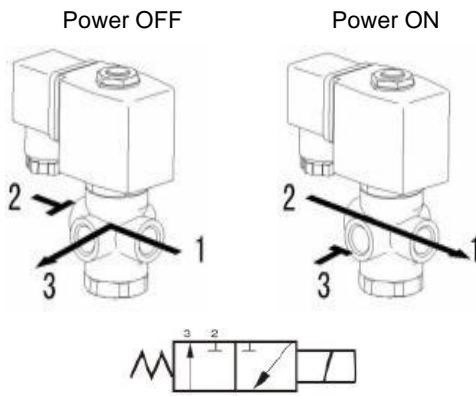

PLT32 Brass Series, Normally Closed with Coil

Port Size	Orifice (mm)	KV	Min Pressure	Max Pressure		Seals Material	Body Material	Valve Body	Coil
				AC(22VA)	DC(13W)				
1/4"	2	0.12	0.0 Bar	8 Bar	8 Bar	VITON	Brass	PLT32BH02S02V	C13

PNEUMATRON

www.pneumatron.co.za

sales01@pneumatron.co.za

3/2 Industrial Solenoid Valve

PLT32 Brass Series 3/2 Valves Normally Closed

Coil Specifications

Voltage	Inrush (50HZ VA)	Holding (50HZ VA)	Watt (DC)
AC220V	55	22	
DC24V			13
DC12V			13

