

PNEUMATRON

www.pneumatron.co.za

sales01@pneumatron.co.za

5/2 Way Namur Pneumatic Solenoid Valve P4M310 Namur Single Solenoid Series

Specifications


Working media: Filtered Air
Temperature: 0°C to 50°C
Pressure: 1.5 to 8 Bar
Port size: Inlet=1/4"
Exhaust=1/4"
Coil voltages: 220VAC, 24VDC, 110VAC, 12VDC
100% ED IP65
Max Action: 5 Cycles/Second
Response time: 0,05s
Body material: Aluminium Alloy
Seal: NBR



P4M Series 5/2 Way Namur Single Solenoid Valve

Inlet Port Size	Exhaust port size	Kv	Min pressure	Max pressure		Valve no	Coil
				AC (5.5VA)	DC (4.8W)		
1/4"	1/4"	1.211	1,5 Bar	8 Bar	8 Bar	P4M310-08	C532

Dimensions

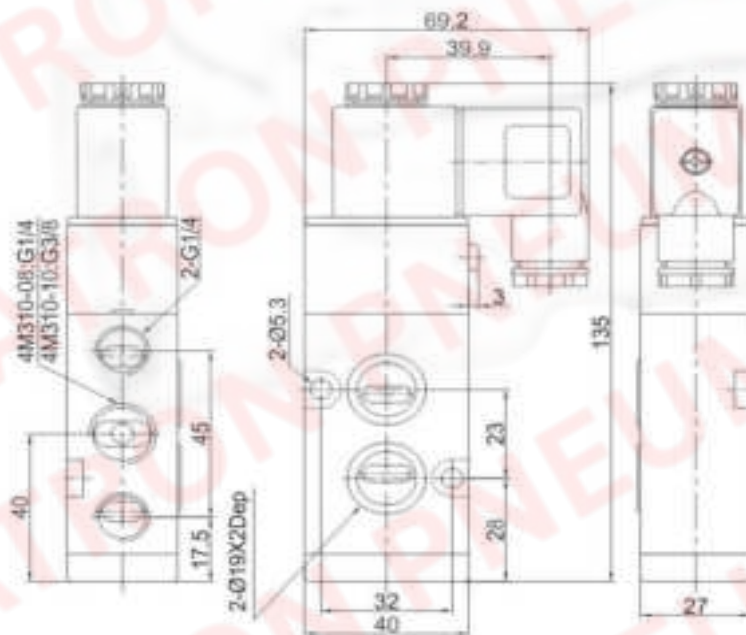


PNEUMATRON

www.pneumatron.co.za

sales01@pneumatron.co.za

DIN Plug Wiring Connections

Wiring Connections AC

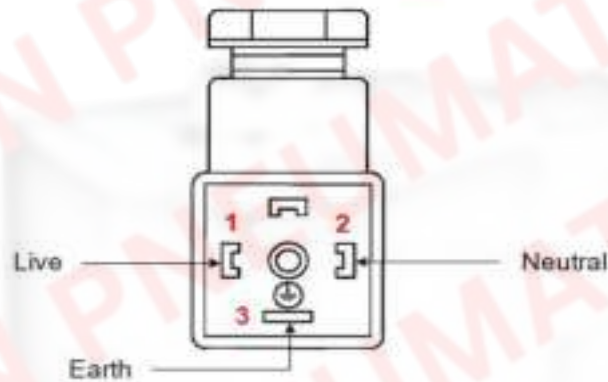

Wiring Connections DC

