

PNEUMATRON

www.pneumatron.co.za

sales01@pneumatron.co.za

5/2 Way Industrial valve Single Solenoid PDD520 Series directional solenoid valve

Specifications

Temperature: -5°C to 50°C
Pressure: 1.5 to 8 Bar
Joint Pipe Bore: Inlet/Outlet=1/4"
Exhaust=1/8"
Coil voltages: 24VDC & 220VAC
100% ED IP65
Max Action: 5 Cycles/Second
Response time: 0,5s
Body material: Aluminium Alloy
(Dimensions page 2)



PDD520 Series 5/2 way Single Solenoid Valve

Inlet/Outlet port size	Exhaust port size	Kv	Min pressure	Max pressure		Valve no
				AC	DC	
1/4"	1/8"	0.89	1,5 Bar	8 Bar	8 Bar	PDD520-02S-XX

5/2 Way Industrial valve Double Solenoid PDD520 Series directional solenoid valve

Specifications

Temperature: -5°C to 50°C
Pressure: 1.5 to 8 Bar
Joint Pipe Bore: Inlet/Outlet=1/4"
Exhaust=1/8"
Coil voltages: 24VDC
220VAC
100% ED IP65
Max Action: 5 Cycles/Second
Response time: 0,5s
Body material: Aluminium Alloy
(Dimensions page 3)



PDD520 Series 5/2 way Double Solenoid Valve

Inlet/Outlet port size	Exhaust port size	Kv	Min pressure	Max pressure		Valve no
				AC	DC	
1/4"	1/8"	0.89	1,5 Bar	8 Bar	8 Bar	PDD520-02D-XX


PNEUMATRON

www.pneumatron.co.za

sales01@pneumatron.co.za

Dimensions

PDD520 Series Single Solenoid directional solenoid valve

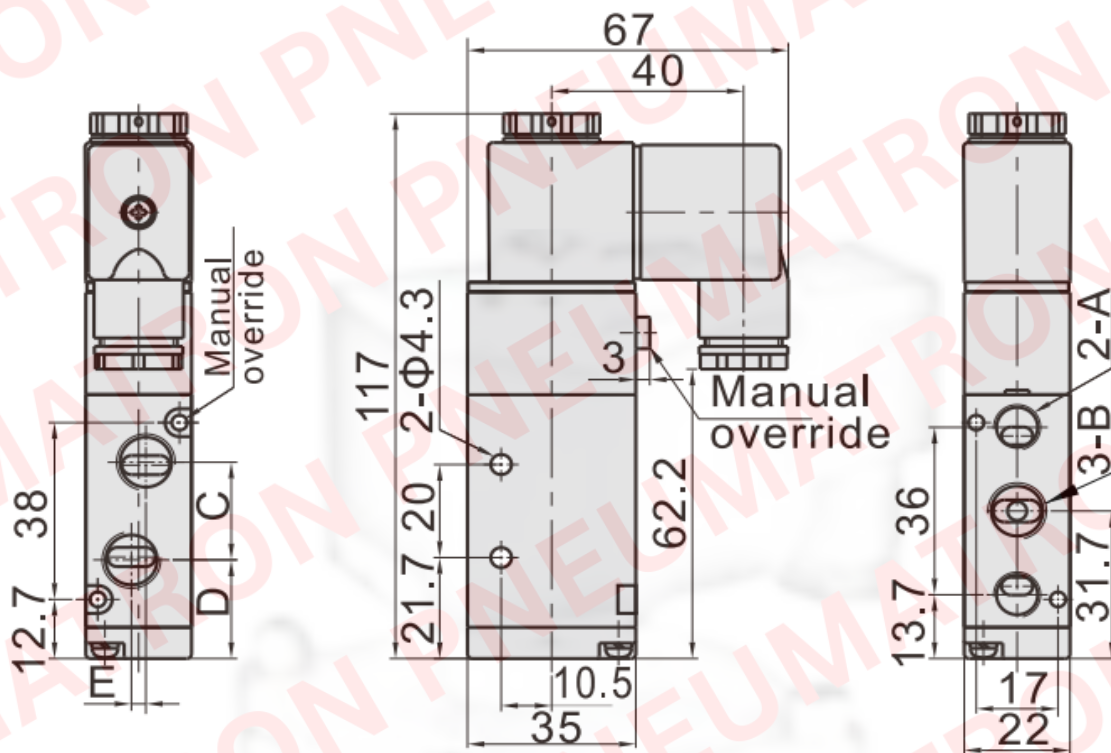

Part no.	A	B	C	D	E
PDD520-02S	1/8"	1/4"	21	21.2	3


PNEUMATRON

www.pneumatron.co.za

sales01@pneumatron.co.za

Dimensions

PDD520 Series Double Solenoid directional solenoid valve

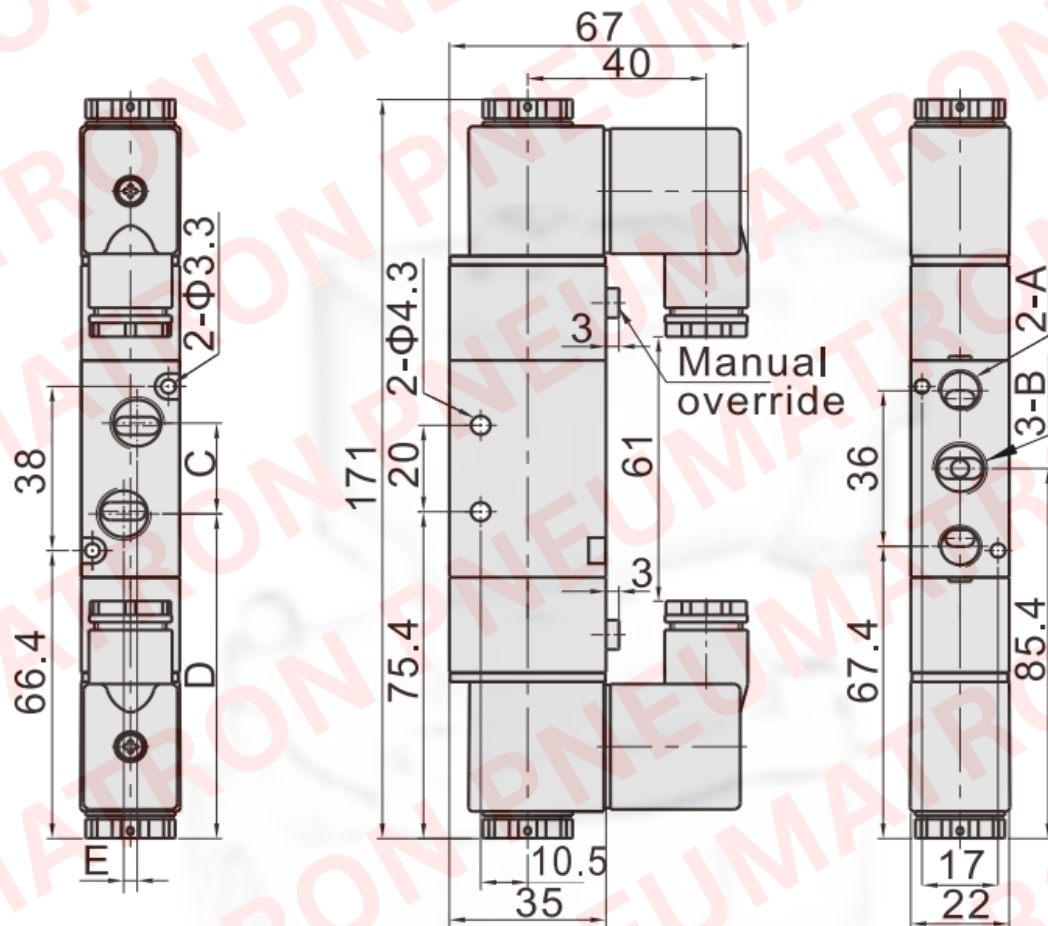

Part no.	A	B	C	D	E
PDD520-02D	1/8"	1/4"	21	74.9	3